



## Performance & ease of use

- Unrestricted working envelope with a max. 21.60m horizontal outreach
- Unmatched versatility
- Outstanding rough terrain driving features: 4 wheel drive and steer, oscillating axle
- Excellent time to full height 95 sec. thanks to full proportional controls and simultaneous boom functions

## Optimized serviceability

- Exclusive modular basket quick and easy to repair
- Easy access to all components
- Self-diagnosis tool integrated on the lower control box

## Best safety feeling

- Haulotte Activ'Shield™ Bar
- Most rigid boom



**Haulotte**   
GROUP

More than lifting






# HA32 RTJ PRO

ROUGH TERRAIN ARTICULATING BOOMS

## TECHNICAL DATA

## HA32 RTJ PRO

|  |   |
|--|---|
| Working height                         | 31.8 m  |
| Platform height                        | 29.8 m  |
| Horizontal outreach                    | 21.6 m  |
| Up and over clearance                  | 11.35 m   |
| Below ground reach                     | 5.5 m   |
| Lift capacity                          | 250 kg  |
| <b>F x G</b> Platform size             | 2.44 x 0.91 m   |
| <b>A</b> Length - stowed               | 11.7 m  |
| <b>H</b> Transport length              | 8.9 m   |
| <b>B</b> Width                         | 2.53 m  |
| Width - with extended axles            | 3.3 m   |
| <b>C</b> Height - stowed               | 2.8 m   |
| Transport height                       | 3.75 m  |
| Vertical jib rotation                  | 140° (+70/-70)  |
| Platform rotation                      | 180° (+90/-90)  |
| Turntable rotation                     | 360° continuous   |
| Tailswing                              | 3.3 m   |
| <b>D</b> Wheelbase                     | 3.5 m   |
| <b>E</b> Ground clearance              | 38 cm   |
| Tilt                                   | 5°  |
| Drive speed                            | 0,5 - 5 km/h  |
| Gradeability                           | 45 %  |
| Turning radius - outside axle extended | 5.74 m  |
| Tires - foam-filled                    | 445/65-22.5   |
| Power source                           | TIER 3: Perkins 55.5 kW - 75.4 hp (Europe) / 62.4 kW - 84.9 hp (outside Europe) TIER 4: DEUTZ 55 kW-74 hp |
| Weight                                 | 20 100 kg   |

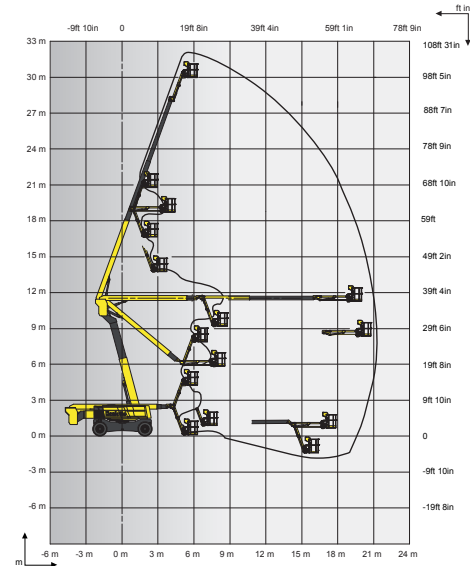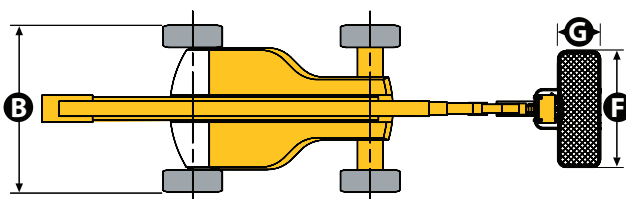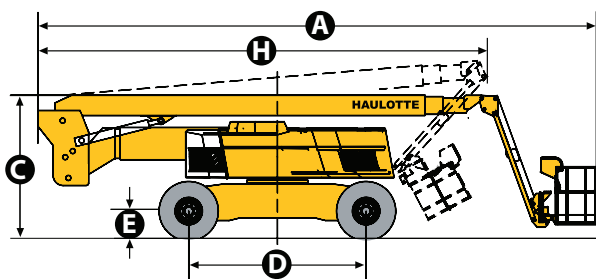

## STANDARD EQUIPMENT

- 4 wheel drive and steer
- Front oscillating axle increasing stability on uneven ground
- 2 extendable axles
- Differential wheel lock increasing rough terrain capacity
- Proportional controls enhancing comfort and safety
- 4 simultaneous movements for highest productivity
- 250kg / 550lbs (2 persons) load capacity unrestricted working envelope
- Modular large platform with drop bar entry gate
- Upper control box protection cover and tool tray in plastic ultra-solid material
- Power to platform 110 V / 220 V (Female plug in the basket)
- Safe to use in winds up to 60km/h - 37mph
- Sound and light alarm for tilt and load
- Electric pump system and emergency descent
- 12 V battery / electrical control system
- Towing hooks
- Hourmeter
- Low fuel level indicator (upper control box)
- Engine pre-heater with light indicator
- Basket compensation +/-10°
- Travel alarm
- Driving beacon
- Enhanced Swing out engine tray for ease of maintenance
- Haulotte Activ'Shield™ Bar (for Europe)

## OPTIONS AND ACCESSORIES

- On-board hydraulic generator 3.5 kW
- Lateral swing door gate
- Glazier Pack
- Pipe cradle pack
- Hydraulic oil cooler
- Hydraulic oil in tank and circuit for warm countries
- Biodegradable hydraulic oil
- Automatic Overspeed Air Shutdown Valve (Electric one-way valve, flame arrestor, spark arrestor)
- Cold weather kit
- Air line to platform
- Cap with key for diesel tank
- 55 W Platform working light
- Haulotte Activ'Shield™ Bar (outside Europe)